



Click Here To View  
Item at

[www.GapPower.com](http://www.GapPower.com)

*Sales • Rentals  
Parts & Service*



# Trench-It™

## Trencher

### FEATURES

- Manual side-shift comes standard
- Hydraulic side-shift optional
- High speed chain for faster digging



Auger is removable, allowing operator to trench close to obstacles when using side shift.



Built-in crumpler for loose soil removal.



Replaceable spoil auger mounds most spoil to one side of trench.



### You'll Dig This...

For tough-to-tackle trenching jobs, our unit offers contractors a heavy-duty, easy-to-operate solution for digging trenches – large or small.



Side-shift allows for trenching closer to structures.

Prices and specifications subject to change without notice.



# 1-866-428-8224

[www.quickattach.com](http://www.quickattach.com)



**F.O.B. THE FACTORY**



SKID STEER



MINI SKID STEER



COMPACT TRACTOR




UTV

**Trench-It**

Standard Flow - #901000 through 901069

High Flow - #901024 through 901035

**EAT•N** | Char-Lynn

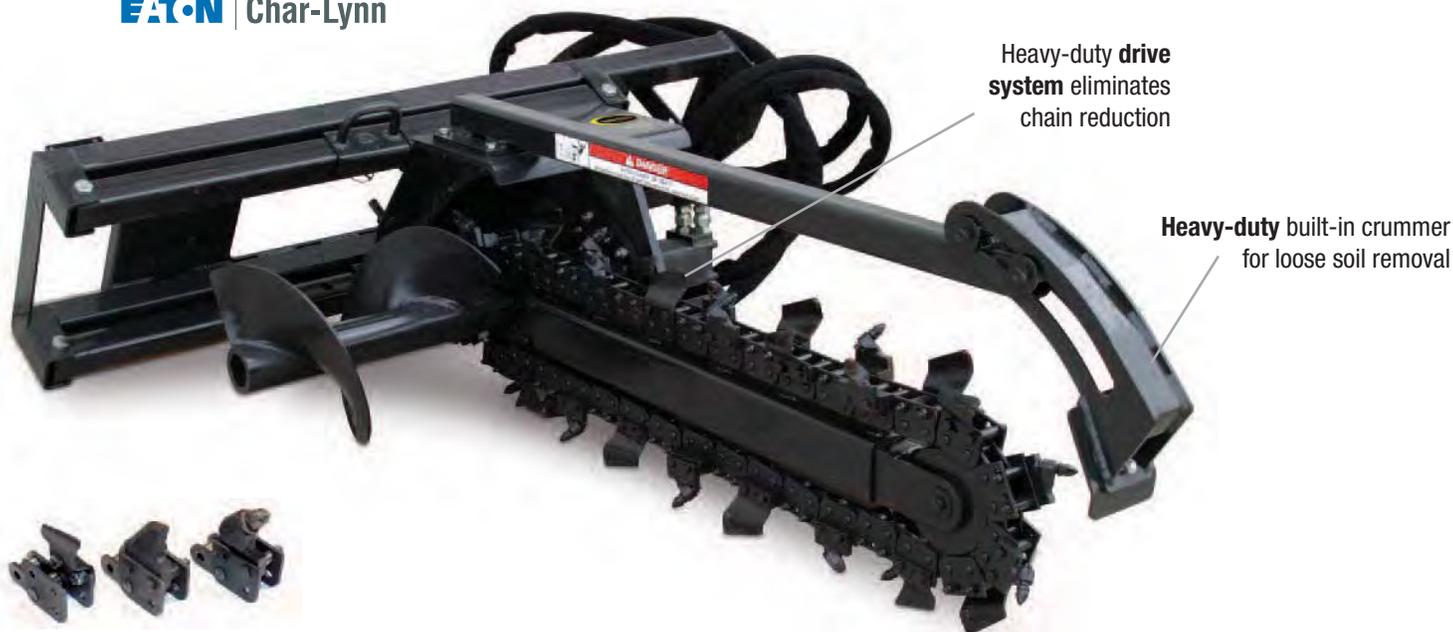

Heavy-duty **drive system** eliminates chain reduction

Heavy-duty built-in **crumpler** for loose soil removal



Double Standard, Scorpion, and Bullet Teeth

(photos shown with optional 50/50 Bullet 7 Standard Chain)

**STANDARD SPECIFICATIONS**

Model	Standard Flow	High Flow
Weight (3' x 6" Double Cup)	1,100#	-
Weight (4' x 6" Double Cup)	1,200#	1,250#
Height	24.625"	24.625"
Width	60.75	60.75"
Length (3' x 6" Double Cup)	82.625	-
Length (4' x 6" Double Cup)	96.625	96.625
Trenching Depth @ 60° (3' x 6" Double Chain)	38"	-

Model	Standard Flow	High Flow
Trenching Depth @ 60° (4' x 6" Double Chain)	50"	50"
Operating PSI	2000-3000	2500-3500
Rated Flow (GPM)	15-25	25-40
Shaft Speed (RPM)	125-225	150-240
Standard Boom	3'	4'
Standard Teeth	Cup	Cup
Side Shift (to the right of center)	24"	24"



*"Consider it pure joy, my brothers and sisters, whenever you face trials of many kinds."*  
James 1:2

**Phones open 24 hours a day, 7 days a week...**