



Sales Rentals

Sales Service

Parts & Service



TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

High-performance, versatile blast cleaning system removes contamination, corrosion, mill scale, and coatings from most surfaces. Produces a uniform surface texture, and creates a surface profile to increase bonding for coatings.

Model 1648 holds 3 cubic feet of abrasive providing 15 minutes of blasting at 100 psi with a No. 6 (3/8-inch) nozzle.

Requirements for Operation

These items are required but not included with this equipment:

- Clean, dry, compressed air of sufficient volume to maintain desired pressure at the nozzle. Refer to Air Consumption Chart in Blast Off 2 booklet (publication stock no. 09294).
- Minimum of 50 psi needed to close the pop-up valve and pressurize the blast machine.
- OSHA-required remote control system that interrupts blasting if operator should lose control of the nozzle when blast machine is pressurized.
- NIOSH-approved, type CE, supplied-air respirator.
- Grade D breathing-air supply as defined by Compressed Gas Association Commodity Specification: G-7.1 (Refer to www.cganet.com).
- Abrasive blast media specifically manufactured for abrasive blasting and appropriate for your application.
- Appropriate blast suit, work boots, hearing and eye protection.

Description

Field-portable, medium-duty, industrial, single-chamber blast machine rated at 150 psi working pressure. Model 1648 has 1-1/4 inch piping and holds 3 cubic feet of media (300 lbs expendable, mineral abrasive). This unit is equipped with FSV abrasive metering valve and remote controls. Complete system includes coupled hose, nozzle, supplied air respirator, and many accessories.

3 Cuft Classic Blast Machine Systems with 1-1/4" piping



Description of Operation

The operator controls blasting from a remote control handle at the nozzle. Pressing the handle starts blasting; releasing it stops blasting. The blast machine contains abrasive and meters it into the compressed air stream.


Approvals and Certifications

Blast machine pressure vessel built to American Society of Mechanical Engineers (ASME) specifications for 150-psi working pressure. Vessel is hydrostatically tested and National Board-certified.

Remote control system complies with OSHA regulation 1910.244 (b).

Advantages

- Field-portable, industrial-quality blast machine manufactured to ASME code.
- 1-1/4-inch piping allows up to 50 percent more air flow when compared with 1-inch piping.
- Industrial-quality valves, piping and fittings designed to maximize air flow and minimize energy required to operate the system.
- FSV abrasive metering valve maintains smooth, consistent, adjustable media flow.
- State-of-the-art NIOSH-approved respirator with DLX comfort-fit suspension.

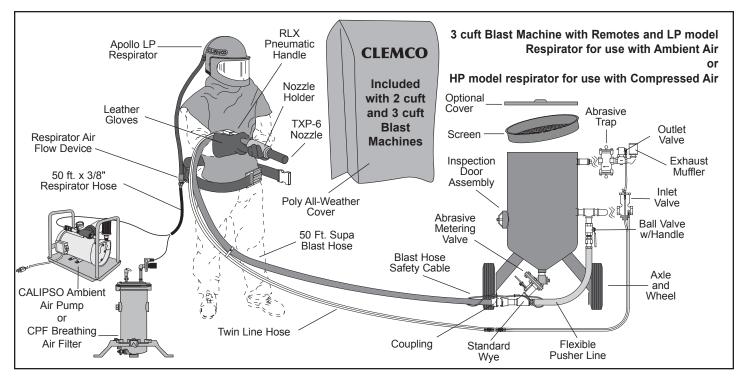

Model 1648: 3 cuft Blast Machine, Classic			Item Description	Stock No.	Wt
with 1-1/4" piping; 150 psi working pressure		Accessory Package 1-1/2" Air filter w/ manual drain22363			
Item Description	Stock No.	Wt.	50 ft. x 1-1/4" Supa hose w/ N		
Without remotes: with FSV abrasive metering valve		and CQPS-2Blast hose safety cable TXP-6 nozzle	15013	42 1.5	
	tationary01180 33		Blast machine screen, 16" Poly all-weather cover	03099 15143	
and FSV abrasive metering valve		Leather gloves, 1 pair		.5	
portable	portable01179 335 Ind Manual Quantum metering valve		Nylon ties, 8 ea02195 CQGP-3 gaskets, pk of 1008853 NW-32 nozzle washers, pk of 1091026		
portable23767 and Sentinel abrasive metering valve		325	Abrasive trap screens, (6) Helmet outer lenses, pk of 25	02012	<.5 <.5 1
with ACS (abrasive cut-off swi		345	Options/Accessories		
stationary		345	Blast machine cover, 16"	02335	6
		0.0	Metering valve, manual Quan		9
Systems			Carbon monoxide alarm, CMS-		4
1648-300-CA11260 475 Includes: 1-1/4" piping, Blast machine 01179, Apollo 600 HP DLX (for use with compressed air) respirator			Ambient Air Pumps		
			CALIPSO, sgl operator		73
			CAP-4, 4 operators w/ frame		175
with Clem-Cool Air Conditioner (CCAC), 50 ft.			CAP-4C, 4 operators w/ cart22384 205 Blast suit, heavy cotton/leather		
respirator hose, CPF 20 Breathing-air filter and Accessory Package			S (08920), M (08921), L (08922), XL (08923),		
1648-ACS-CA23909 485			2XL (24201), 3XL (24202)		
Includes: 1-1/4" piping, Blast machine 21062, Apollo 600 HP DLX respirator with Clem-Cool Air Conditioner (CCAC), 50 ft. respirator hose, CPF 20 Breathing-air filter and Accessory Package			Blast suit, seasonal cotton/nylon S (22913), M (22914), L (22915), XL (22916), 2XL (22917), 3XL (25022), 4XL (24689)		
			Operation Manuals Blast Machine without Remotes06160 Blast Machine with TLR300 Remotes		
1648-300-AA					

ISO 9001:2008 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.