



Sales Rentals

Sales Service

Parts & Service

DANUSER INDUSTRIAL GROUP

www.danuser.com

AUGER BUCKET

Eliminates backbreaking labor from mixing, transporting, and dispensing

Concrete (up to 1" slump) Sand Washed Gravel (3/4" max.)


Wildlife Feed Asphalt Agricultural Grains



Add a proven Danuser attachment to your fleet!

Specifications

Side

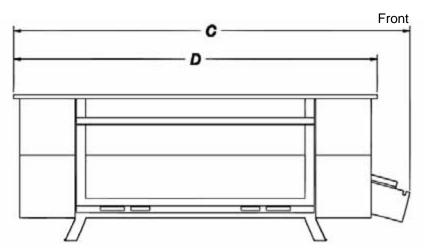

Overall Height	(A)	27"
Overall Width	(B)	21-1/2"
Overall Length	(C)	74-1/2"
Overall Bucket Length	(D)	68-1/2"
Weight		380 lbs.
Hydraulic Requirements		12 GPM
		2000 PSI
Auger Length		61-1/2"
Auger Diameter without Rubber		4"
Auger Diameter with Rubber		6-1/2"
Auger Flighting Spacing		4"

Features

- 1/2 yard capacity is 22 bags (80 lbs. ea.) of premix concrete. 3/4 yard capacity capable with optional hopper extension.
- Accurate and controlled discharge -1/2 yard in 50 seconds
- Horizontal steel auger with Eaton hydraulic motor drive
- Replaceable protective rubber flighting prevents binding of coarse material.
- Universal skid-steer attachment

- Quick attach frame on either side allows right- or left-hand discharge.
- Self loading from loose piles
- Excellent operator visibility
- One-person operation
- Can be ordered as a concrete mixer
- 7' hose kit with flat face couplers included.
- Two multi-linked chutes (24" & 36" long) included.

DANUSER INDUSTRIAL GROUP

500 E. Third Street P.O. Box 368 Fulton, MO 65251 TEL: (573) 642-2246 FAX: (573) 642-2240

E-MAIL: sales@danuser.com